

FLASH

LED WALL WASHER BAR LIGHT


24X3W RGB 3in1 8 SEKCJI

F7200208



User Instructions


1. KEY AND DISPLAY FUNCTIONS



A B C D

- A. Function
- B. +
- C. -
- D. Enter
- E. LCD Display

Display instruction

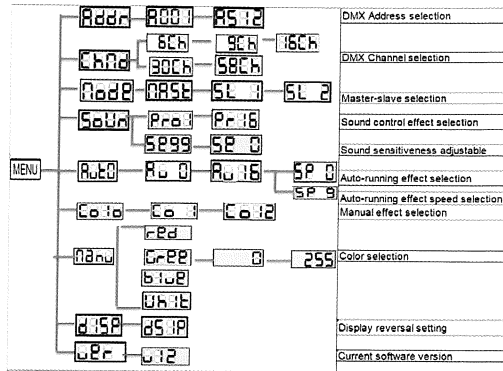

2. DMX CHANNELS INSTRUCTIONS:

5Channels:

Channel	Value	Function
1	0-255	Red 0-100%
2	0-255	Green 0-100%
3	0-255	Blue 0-100%
4	0-255	See Color Chase Table
5	0-255	Chase Speed Slow To Fast

8channels:

Channel	Value	Function
1	0-255	All dimming
2	0-255	Strobe
3	0-255	Red 0-100%
4	0-255	Green 0-100%
5	0-255	Blue 0-100%
6	0-255	See Color Chase Table
7	0-255	Auto program

8	0-255	Chase Speed Slow To Fast
---	-------	--------------------------

14Channels:

Channel	Value	Function
1	0-255	All dimming 1
2	0-255	Strobe
3	0-255	Red 1 0-100%
4	0-255	Green 1 0-100%
5	0-255	Blue 1 0-100%
6	0-255	Auto program
7	0-255	All dimming 2
8	0-255	Strobe
9	0-255	Red 2 0-100%
10	0-255	Green 2 0-100%
11	0-255	Blue 2 0-100%
12	0-255	See Color Chase Table
13	0-255	Auto program
14	0-255	Chase Speed Slow To Fast

26Channels:

Channel	Value	Function
1	0-255	All dimming 1
2	0-255	Strobe1
3	0-255	Red 1 0-100%
4	0-255	Green 1 0-100%
5	0-255	Blue 1 0-100%
6	0-255	Auto program1
7	0-255	All dimming 2
8	0-255	Strobe2
9	0-255	Red 2 0-100%
10	0-255	Green 2 0-100%
11	0-255	Blue 2 0-100%
12	0-255	Auto program2
13	0-255	All dimming 3
14	0-255	Strobe3
15	0-255	Red 3 0-100%
16	0-255	Green 3 0-100%
17	0-255	Blue 3 0-100%
18	0-255	Auto program3
19	0-255	All dimming 4
20	0-255	Strobe4
21	0-255	Red 4 0-100%
22	0-255	Green 4 0-100%
23	0-255	Blue 4 0-100%
24	0-255	See Color Chase Table
25	0-255	Auto program
26	0-255	Chase Speed Slow To Fast

50Channels:

Channel	Value	Function
1	0-255	All dimming 1
2	0-255	Strobe1
3	0-255	Red 1 0-100%
4	0-255	Green 1 0-100%
5	0-255	Blue 1 0-100%
6	0-255	Auto program1
7	0-255	All dimming 2
8	0-255	Strobe2
9	0-255	Red 2 0-100%
10	0-255	Green 2 0-100%
11	0-255	Blue 2 0-100%
12	0-255	Auto program2
13	0-255	All dimming 3
14	0-255	Strobe3
15	0-255	Red 3 0-100%
16	0-255	Green 3 0-100%
17	0-255	Blue 3 0-100%
18	0-255	Auto program3
19	0-255	All dimming 4
20	0-255	Strobe4
21	0-255	Red 4 0-100%
22	0-255	Green 4 0-100%
23	0-255	Blue 4 0-100%
24	0-255	Auto program4
25	0-255	All dimming 5
26	0-255	Strobe5
27	0-255	Red 5 0-100%
28	0-255	Green 5 0-100%
29	0-255	Blue 5 0-100%
30	0-255	Auto program5
31	0-255	All dimming 6
32	0-255	Strobe6
33	0-255	Red 6 0-100%
34	0-255	Green 6 0-100%
35	0-255	Blue 6 0-100%
36	0-255	Auto program6
37	0-255	All dimming 7
38	0-255	Strobe7
39	0-255	Red 7 0-100%
40	0-255	Green 7 0-100%
41	0-255	Blue 7 0-100%
42	0-255	Auto program7
43	0-255	All dimming 8
44	0-255	Strobe8
45	0-255	Red 8 0-100%
46	0-255	Green 8 0-100%

47	0-255	Blue 8 0-100%
48	0-255	See Color Chase Table
49	0-255	Auto program
50	0-255	Chase Speed Slow To Fast

Color Chase Table

Color Chase	000-007 No function	No function
	008-022 Color Chase 01	Color effect 1
	023-037 Color Chase 02	Color effect 2
	038-052 Color Chase 03	Color effect 3
	053-067 Color Chase 04	Color effect 4
	068-082 Color Chase 05	Color effect 5
	083-097 ColorChase06	Color effect 6
	098-112 Color Chase 07	Color effect 7
	113-127 Color Chase 08	Color effect 8
	128-142 Color Chase 09	Color effect 9
	143-157 Color Chase10	Color effect 10
	158-172 Color Chase 11	Color effect 11
	173-187 Color Chase 12	Color effect 12
	188-202 Color Chase 13	Color effect 13
	203-217 Color Chase 14	Color effect 14
	218-232 Color Chase 15	Color effect 15
233-247 Color Chase 16	Color effect 16	
248-255 Sound active	Sound active 1-16	

Specifications

Model: 24PCSx3W RGB 3in1 8sections LED WASH LIGHT

LED: 24x 3Watt RGB 3in1

Working Position: Any safe working position

Voltage: 100V-245V AC 50/60Hz

Power Draw: 60W

Casing: Aluminum

Net Weight: 2 Kg

Package Size: Dimensions: 1120(L) x 180 (W) x110 (H)mm

Colors: RGB color Mixing

DMX Channels: 5/8/14/26/50DMX channels

IP:IP20

Please Note: Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.